


UNDER ONE  ROOF

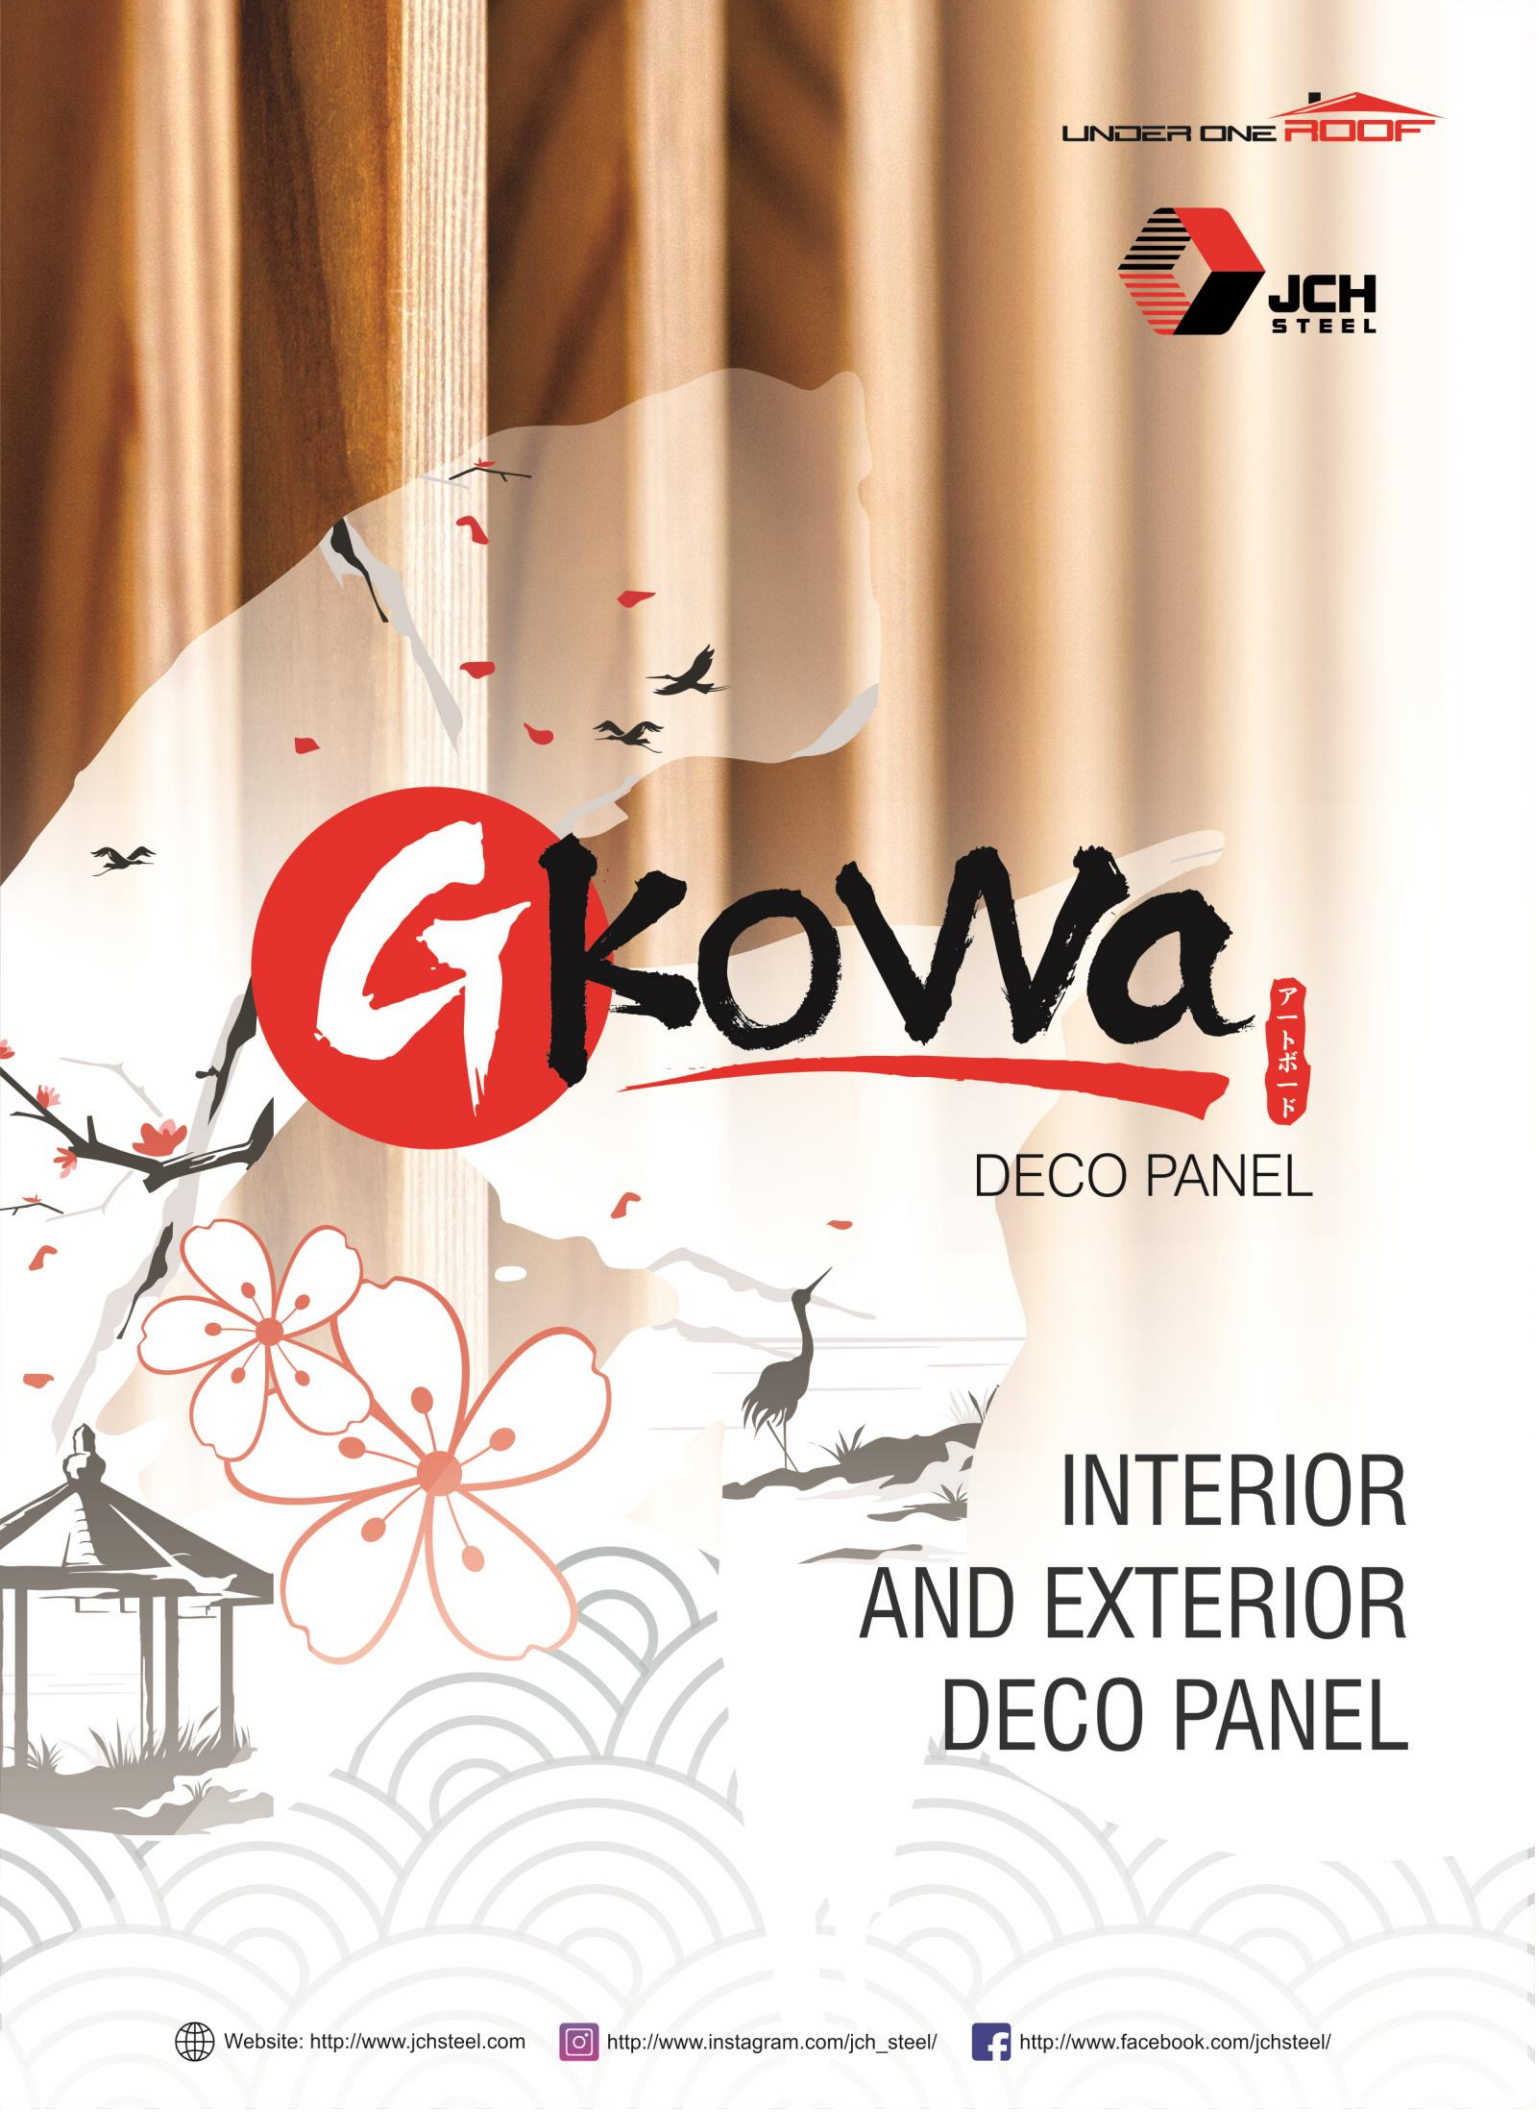

Gkova

アートボード

DECO PANEL

INTERIOR
AND EXTERIOR
DECO PANEL



Website: <http://www.jchsteel.com>



http://www.instagram.com/jch_steel/



<http://www.facebook.com/jchsteel/>

GKOWA Deco Panel

Modern Design | Strength | Durability

DECO PANEL


The GKOWA Deco Panel features a contemporary stripe-corrugated profile that perfectly balances strength, lightness, and rigidity. Its cost-effectiveness and versatility make it an ideal choice for a wide range of commercial and residential applications.

- Hidden Screw System: Ensures a clean, seamless finish while preventing rust for long-lasting aesthetics.
- Single-Skin Option: Available in a single-skin sheet for flexible installation and design solutions.
- Available Thickness: 0.36mm (TCT) and 0.48mm (TCT) to suit various project requirements.
- Versatile Applications: Suitable for interior and exterior walling, cladding, and ceiling installations.


GKOWA Deco Panel – designed to deliver exceptional performance, style, and value for your building needs.



SIDE LAPPING JOIN:

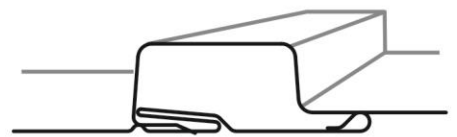


PROFILE SPECIFICATION:

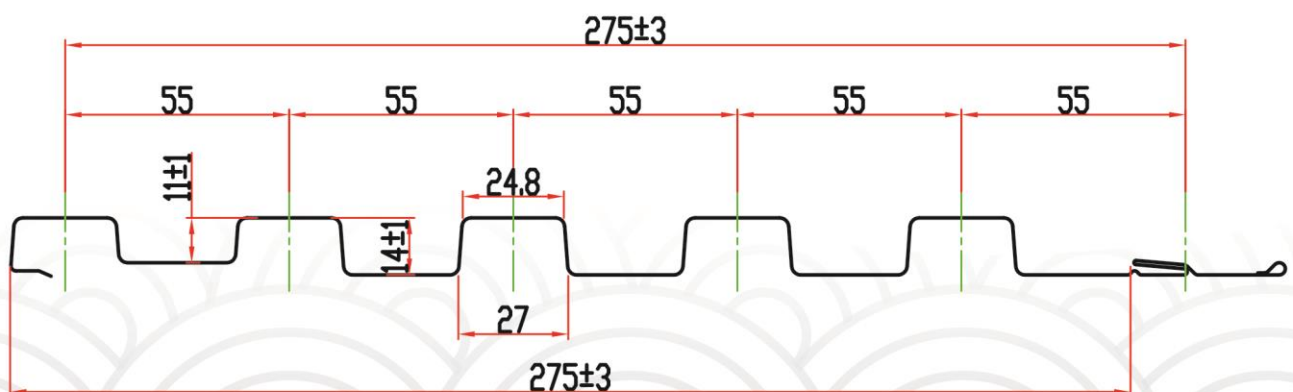



COLOR COATING SYSTEM :

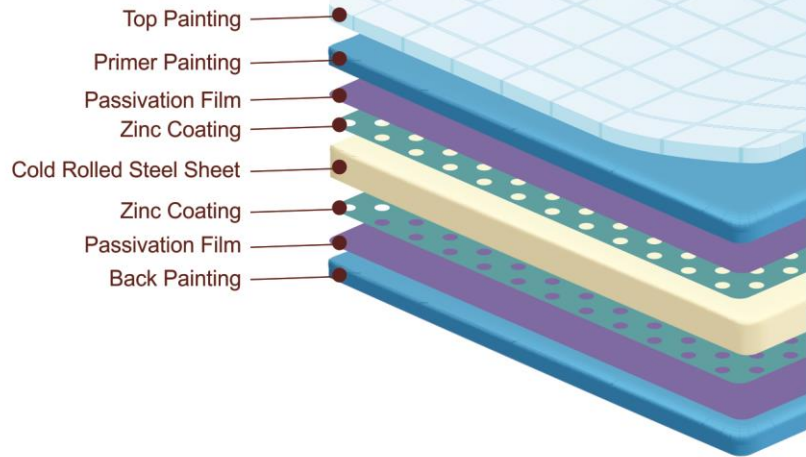

MATERIAL SPECIFICATION:


GKOWA Deco Panel are made from high-quality steel with a Galvalume coating (55% aluminum, 43.5% zinc, 1.5% silicone), GKOWA Deco Panels offer superior protection against corrosion, lasting up to three times longer than traditional galvanized steel. Ideal for applications requiring excellent corrosion resistance and heat reflectivity, these panels ensure long-lasting performance in the toughest conditions.

MATERIAL PROPERTIES:

SUBSTRATE	GRADE OF STEEL (MINIMUM YIELD STRENGTH) (MPa)	BASE METAL THICKNESS-BMT (MM)	TOTAL COATED THICKNESS-TCT (MM)	EFFECTIVE WIDTH COVER (MM)	WEIGHT PER-METER (KG/M ²) ±5%	RIB DEPTH (MM)
AZ 150	550	0.36	0.41	275	1.47	14
AZ 150	550	0.42	0.48	275	1.61	14
AZ 150	550	0.48	0.53	275	1.82	14




METHOD STATEMENT :

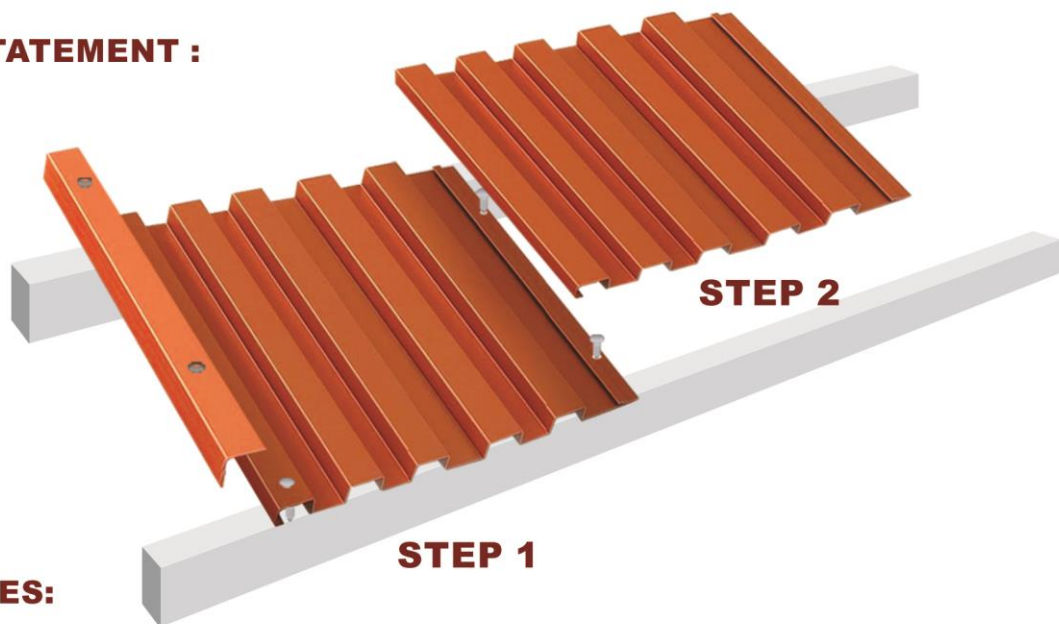

ACCESSORIES:

Accessories are the additional components needed to complete installation. Length available up to 12' (3.660m), subject to transportation limitations.

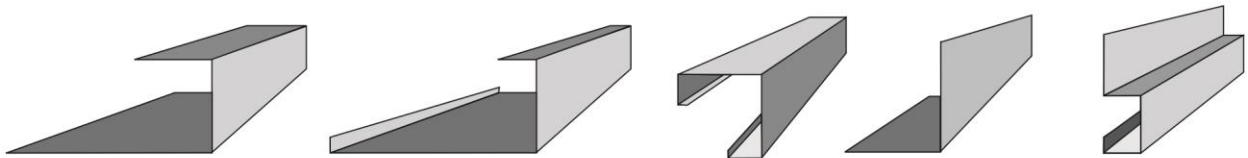

Note: The above items are just some of profiles ; kindly contact our customer service for assistance with customized or specific profile requirements.

WHY CHOOSE OUR GKOWA DECO PANEL ?



GOOD QUALITY

Stringent quality control is the hallmark of JCH STEEL (M) SDN.BHD with 25 years warranty.



GOOD SERVICE

Provides professional services in customizing products to satisfy all customer requirements.



EFFICIENCY - FAST DELIVERY

We make sure to deliver our product to our customers efficiently with speed and satisfaction.



DESIGN FLEXIBILITY



LOW MAINTENANCE



TERMITE PROOF



THERMAL EFFICIENCY



WARRANTY



RECYCLING



DURABILITY

杰盛钢材有限公司
JCH STEEL (M) SDN.BHD (1123117-X)



CERTIFIED TO ISO 9001: 2015
CERT. NO. : QMS03499



CERTIFIED TO ISO 9001: 2015
CERT. NO. : QMS03499

SIBU (HEADQUARTER)

No.7, Lorong Pahlawan 7A2, Jaya Li Hua, 96000 Sibu, Sarawak
Email: jchsteel2014@gmail.com Tel:+6084-220 989 Fax:+6084-220 898

BINTULU (BRANCH)

Lot 603, Blk 20, Kemena Land District, Kidurong Light Industrial Estate,
Jln Tanjung Kidurong, 97000 Bintulu, Sarawak
Email: jch.bintulu2021@gmail.com Tel:+6086-251 899 Fax:+6086-255 575

MIRI (BRANCH)

Lot 5805, Jln Sibu, Tmn Tunku Ind Est, Phase 1, 98000 Miri, Sarawak
Email: jchsteelmiri@gmail.com Tel:+6085-615 989 Fax:+6085-615 898

KUCHING (BRANCH)

Lot 2195, Jalan Tenaga, Bintawa Industrial Estate, 93450 Kuching, Sarawak
Email: jchsteel.kch@gmail.com Tel:+6082-552 662 Fax:+6082-356 333

JCH STEEL